



GT SERIES



GT8

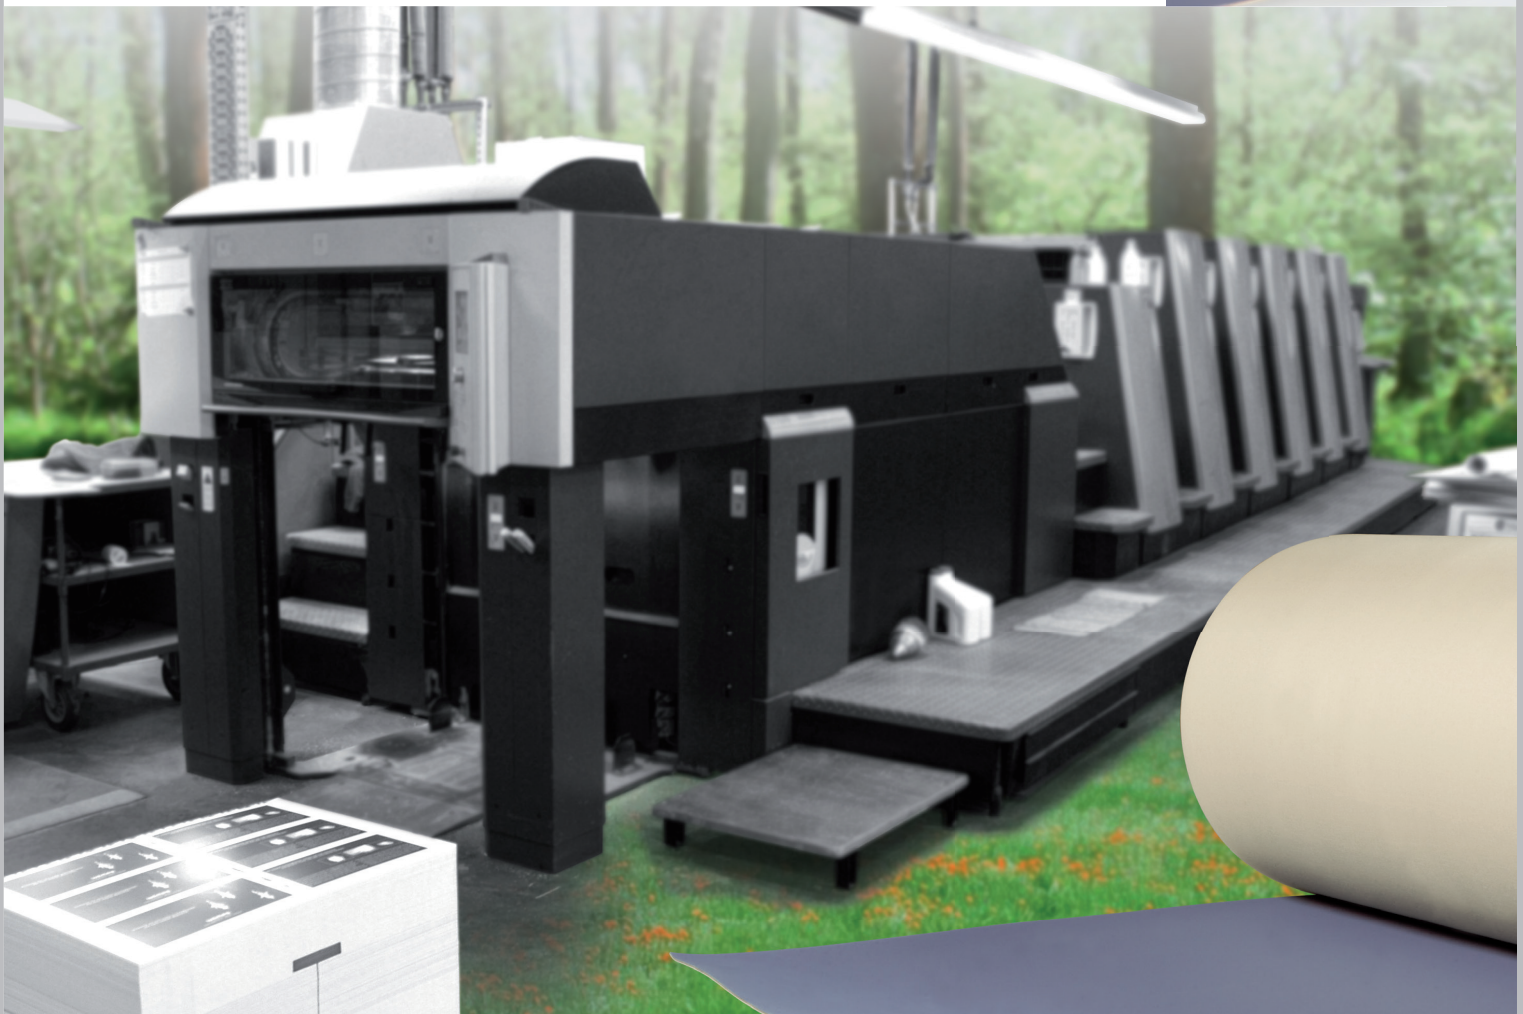

Our strippable double compressible layer blanket construction for highest UV application /

我们的可剥离双层压缩气垫橡皮布可提供最佳UV印刷解决方案

GT SERIES GT8

- ▶ **Innovative double compressible layer construction supports minimizing press shock streaks / 创新的双压缩层结构减少机器冲击杠**
- ▶ **Superior printing quality in terms of round dot shapes, good solid laydown and highest contrast values / 优秀的印刷质量，网点清晰锐利，实地平整，极高的对比度**
- ▶ **Excellent resistance against edge marking, ideal for frequent changes of substrates and format sizes / 极佳的抗纸边切割效果，适合频繁更换大小版面尺寸**

Product attributes / 产品属性

Colour / 颜色	Violet / 紫罗兰色
Identification / 标识	Product name & Made by Continental, batch-No. / 产品名称&大陆集团制造, 批次号
Thickness / 厚度	1.96 mm / 0.077"

Applications / 应用


	Sheet-fed offset 单张纸-胶印	★★★★UV
	Packaging 包装	★★★★UV
	Metal decoration 印铁	★★★★UV
	Waterless printing 无水印刷	
	UV printing UV印刷	★★★★UV
	Hybrid: conv. + UV 混合油墨: UV+普通油墨	
	Waterbased varnishes 水性上光	
	UV varnishes UV上光	
	Newspaper printing 报纸印刷	
	Heatset printing 热固印刷	
	Label printing 标签印刷	★★★★UV
	Business form 商业表格	★★★★UV

★★★★ Excellent / 优 ★★★ Good / 良好 ★ Suitable / 适宜

Abrasion- and swell-resistant EPDM surface for all UV applications / 耐磨和抗膨胀EPDM表面适用于所有的UV印刷

Strippable construction (above second fabric layer) / 可剥离结构 (在第二结构层以上)

Double compressible layer construction supports minimizing press shock streak / 双层可压缩气垫层结构减少机器冲击杠

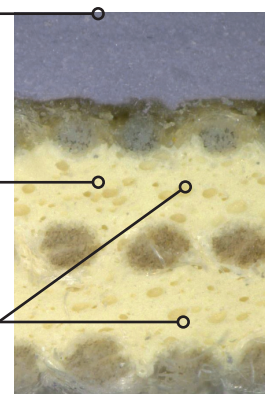

Technical specification / 技术参数

Compressibility at / 可压缩率 1,350 kPa	approx. 12% 大约12%
Hardness total / 整体硬度	approx. 78 Shore A / 大约邵氏78°A
Surface rubber / 表面橡胶硬度	approx. 58 Shore A 大约邵氏58°A
Roughness R _z / 粗糙度R _z	5 µm (fineground) 5 µm (精磨)